AMANO McGANN

OPUS-7800

Central Pay-on-Foot Station



Shown with optional U.S. EMV Terminal.

The OPUS-7800 Series Central Pay-on-Foot Station communicates with Pro+ and is designed for flexibility and ease-of-use in any facility. The fully functional, touch screen-controlled device is the perfect solution for 24/7 unattended operations. The Central Pay-on-Foot Station processes encrypted 2D data matrix barcode tickets from the OPUS-2000/2700 Series Entry Terminals. Payment options include credit card, bills, coins and validations.

Mobile and printed barcode validations can also be processed through the optional FlexScan QR400® barcode scanner.

Features


- 10.4" color touch screen display sunlight readable
- · Banknote recycler
- · Voice announcement and intercom
- Thermal receipt printer with auto-retract
- · Motion sensor arming
- Credential tracking support
- · Illuminated components for ease-of-use
- · TCP/IP network connectivity
- · Supports online and offline fee calculation
- · Textured powder coat finish
- Multiple models are available to meet the needs of various customers and configurations including credit card reader, currency, lost ticket kit, and with or without coin acceptor/recycler
- Compatible with Genetec LPR system for lost ticket and paid LPN recognition at exit





OPUS-7800

Central Pay-on-Foot Station

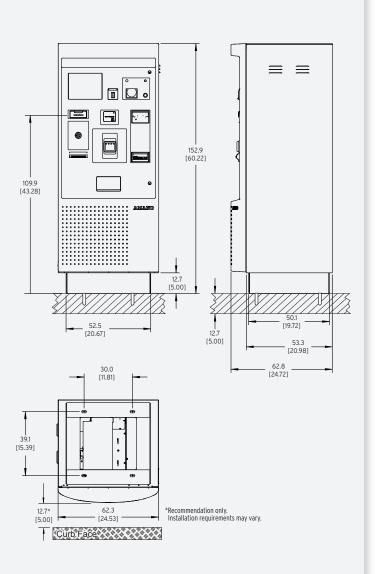

Specifications are approximate and are subject to change without notice.



SPECIFICATIONS

COMPLIANCE

RoHS Compliant

OPUS-7800 Central Pay-on-Foot Station does not store credit card data

Meets ADA (Americans with Disabilities Act) and ANSI (American National Standards Institute) requirements

ELECTRICAL

| Power Source: | 120 VAC, 60 Hz |
|---------------|----------------|
| Utilization: | 12 amp maximum |

TIME CONTROL

Real-time clock synchronization with host computer

ENVIRONMENT

| Temperature: | -20°F ~ 120°F (-29°C ~ 49°C) Automatic thermostat-controlled heater included |
|--------------|---|
| Humidity: | 10% ~ 90% (non-condensing) |

| HOUSING | |
|-----------------|--|
| Height: | 60.22" (152.9 cm) |
| Width: | 24.53" (62.3 cm) |
| Depth: | 24.72" (62.7 cm) |
| Weight: | 390 lbs. (177 kg) |
| Construction: | Sheet steel housing |
| Cabinet finish: | Textured powder coat finish OPUS (RAL#7022); custom color available |
| Door finish: | Metal door with painted molded plastic overlay |

TICKET READER/ENCODING MECHANISM

Reads all accepted 2D data matrix barcode tickets and validation coupons

Easy ticket jam removal

Encodes encrypted 2D data matrix barcode data and transaction data in man-readable text

Vaults used validation coupons and tickets

RECEIPT PRINTER

High speed thermal line dot

8" thermal paper roll

Auto-retract

SECURITY

Multi-point safety lock system

Intruder alarm

Security locks on money handling compartments

INTERCOM/VOICE ANNOUNCEMENT

Aiphone™ LEF series intercom

Standard voice announcement

VERSIONS

Various currencies

PCI P2PE EMV-ready credit card terminal

With or without coin acceptor/recycler (U.S.)

OPTIONAL KITS

Integrated IP Camera

Integrated FlexScan QR400 Barcode Scanner

Integrated Proximity Reader

Third-party Intercom Mounting

(2) Coin hoppers (U.S. version); standard in Canadian version

Lost Ticket

©2019 Amano McGann, Inc. RCS 02/19