



An AMANO
Company

CVPS

Stand-Alone Validator



With a quick scan, customers are on their way with the proper validation applied.

CVPS Stand-Alone Validators are installed at merchant locations such as visitor desks, theater box offices, coffee shops, restaurants, hotels, retailers, and clinics to automate the issuance of validations. Build customer loyalty, add convenience, or provide valuable customer service with the CVPS Stand-Alone Validator.

Features

- Attended or unattended operation
- Fast, user-friendly
- Barcode and QR code compatible
- Easily set parameters through the CVPS back-office software
- Wireless connection options
- Sleek, compact design
- Table-top, floor, or wall configurations
- Contactless operation



Scan, Select, and Go!


1



2



3

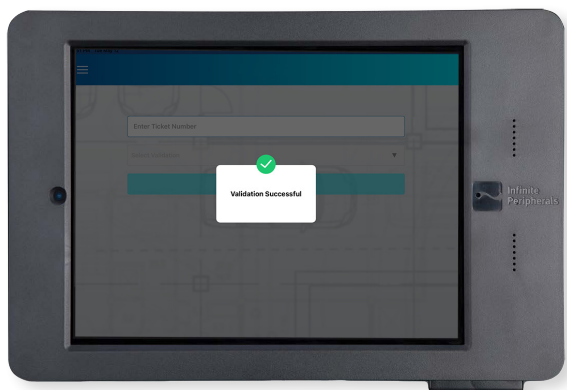

SPECIFICATIONS

CERTIFICATIONS

UL, FCC, CE, RoHS, RCM, Apple®, MFi

ELECTRICAL

Input: 100-240 VAC, 50-60 Hz Max.

Output: 9Vdc 5A Max.

ENVIRONMENT

Temperature: -32°F ~ 95°F (0°C ~ 35°C)

Humidity: 5% ~ 95% (non-condensing)

DIMENSIONS

Height: 1.7" (4.318 cm)

Width: 7.9" (20.066 cm)

Depth: 11.4" (28.956 cm)

Weight: 3.3 lbs (1496.85 g)

DISPLAY

Height: 6" (15.24 cm)

Width: 7.5" (19.05 cm)

