# PRO+ 2700

### Credit Card Entry Terminal







The Pro+ 2700 Series Credit Card Entry Terminal utilizes an encrypted 2D data matrix barcode and the latest architecture to deliver accelerated system processes and transaction speeds.

The Pro+ 2700 Series communicates with Pro+ Software and offers intuitive user guidance through a dynamic color display and voice announcement. The Credit Card Entry Terminal dispenses thermal encrypted 2D barcode tickets and provides credit card-in capability when used online and in conjunction with the Pro+ 4700 Credit Card Exit Terminal or Pro+ 7700 Pay-in-Lane Exit Station. Mobile credentials and printed barcode passes can be processed through the optional FlexScan QR400® barcode scanner.

### **Features**


- Models include standard magstripe (MSR) or PCI P2PE EMV-ready MSR/chip terminal versions
- Contactless credit card options for NFC, Apple Pay, and Google Pay
- · Credential tracking support
- Illuminated components for ease-of-use
- 5.7" color display sunlight readable
- · Touchless wave sensor ticket issue option
- Voice announcement and intercom
- TCP/IP network connectivity
- · Remote device programming
- Proximity access reader, barcode scanner, and Bluetooth options
- · LPR-capable
- · Convertible to Pay-on-Entry device





## PRO+ 2700

### Credit Card Entry Terminal

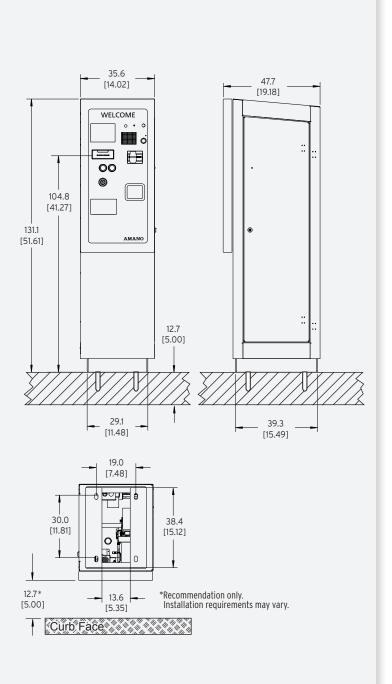

Shown with optional EMV Terminal. Specifications are approximate and are subject to change without notice.

©2020 Amano McGann, Inc. RCS 09/20



#### **SPECIFICATIONS**

#### **COMPLIANCE**

**RoHS Compliant** 

The Pro+ 2700 does not store credit card data

Meets ADA (Americans with Disabilities Act) and ANSI (American National Standards Institute) requirements

#### **ELECTRICAL**

120 VAC, 60 Hz Power Source: **Utilization:** 10 amp maximum (120V)

#### TIME CONTROL

Real-time clock synchronization with host computer

#### **ENVIRONMENT**

-20°F ~ 120°F (-29°C ~ 49°C) Temperature: Automatic thermostat-controlled heater included

**Humidity:** 10% ~ 90% (non-condensing)

#### HOUSING

Heavy-duty, 14-gauge steel construction, weather gasketing, lockable door Height: 51.6"(131.1 cm) Width: 14.0"(35.6 cm) 19.18" (48.7 cm) Depth: Weight: 140 lbs. (63.5 kg) Ticket throat: 41" (104 cm) Finish (Standard): Textured powder coat finish Amano Light Gray (RAL#7047;

Custom color available

#### TICKET READER/ENCODING MECHANISM

Easy ticket jam removal

Encodes encrypted 2D data matrix barcode data and transaction data in man-readable text

Self-sharpening ticket cutter blade

Vaults backaway tickets

#### **TICKETS**

Uses fanfold thermal tickets: 5,000 tickets/carton. Holds two cartons.

Credit card size tickets: 2-1/8" x 3-3/8" (5.40 cm x 8.65 cm)

#### INTERCOM/VOICE ANNOUNCEMENT

Aiphone LEF series intercom

Standard Voice Announcement

#### **OPTIONAL KITS**

Touchless Ticket Issue Sensor

Integrated IP Camera

Integrated FlexScan QR400 Barcode Scanner

Integrated Proximity Reader

Third-party Intercom Mounting