Amano ONE

Series

Pay-on-Foot Station Cash & Credit Card

OVERVIEW

The Amano ONE Pay-on-Foot Station delivers the convenience of cash acceptance in strategic locations of your facility for an expedited exit process paired with a notably small footprint for versatile deployment. The device processes 2D barcode tickets from Amano ONE Entry Stations, and manages payments via cash, credit card, and validation options.

The Pay-on-Foot Station offers enhanced customer convenience through intuitive user guidance, a large touchscreen display, and a built-in call center. The device communicates with the Amano ONE cloud platform for simplified deployment and seamless updates, accelerated transactions, and reliable performance.


FEATURES


- Magstripe and P2PE EMV-ready MSR/Chip terminals
- Contactless credit card options for NFC, Apple Pay, and Google Pay
- Banknote recycler
- Intelligent QR barcode with mobile pay option
- TCP/IP network connectivity
- · Intercom and camera for built-in call center
- Modular USB components for simplified service
- Accelerated processing and transaction speeds
- Automatic deployment of updates through the cloud
- Communicates with Amano ONE cloud-based software





Cash & Credit Card Pay-on-Foot Station

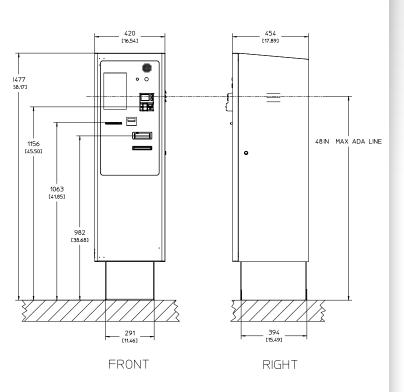



INSTALLATION

Recommendation only. Installation requirements may vary.

Specifications are approximate and are subject to change without notice.





Specifications

COMPLIANCE

RoHS Compliant

Amano ONE Pay-on-Foot Stations do not store credit card data

Meets ADA (Americans with Disabilities Act) requirements

ELECTRICAL

4.0A @120V at idle Operational:

6.3A momentary peak, when heater is not running

10.7A when heater is running

Power Source: 120 VAC, 60 Hz, 15A circuit protection

TIME CONTROL

Real-time clock synchronization with host computer

ENVIRONMENT

| Temperature: | -40°C ~ 55°C Ambient |
|--------------|----------------------------|
| Humidity: | 10% ~ 95% (non-condensing) |

HOUSING

| Heavy-duty, 14-gauge steel construction, weather gasketing, lockable door | |
|---|---|
| Height: | 51.6" (131.1 cm) |
| Width: | 16.6" (42.2 cm) |
| Depth: | 19.18" (48.7 cm) |
| Weight: | 210 lbs. (95.3 kg), 276.5 lbs. (125.5 kg) with BNR installed |
| Finish (Standard): | Textured powder coat finish Amano EN75 Light Gray (RAL#7047) Custom color available upon manufacturer approval |

| DISFERI | | |
|---------------------|----------------------------|--|
| Graphic color 10" L | CD with backlight | |
| Height: | 8.5" (21.59 cm) | |
| Width: | 5.3" (13.46 cm) | |
| Display Buttons | Lost Ticket, Receipt, Help | |

BARCODE SCANNER

| Opening: | 60mm x 50mm |
|----------------|--|
| Barcode Types: | 1D (Linear) and 2D (QR) |
| Ambient Light: | Total darkness to 9,000 ftcandles (96,900 LUX) |

TICKET READER/ENCODING MECHANISM

Thermal printer with 1550' paper roll

Encodes 2D data matrix barcode data

Reads all accepted 1D and 2D data matrix barcode tickets, validation coupons, and

INTERCOM/CAMERA

Integrated IP intercom and camera

Compatible with many other third-party intercom devices

BANKNOTE CAPACITIES

Recycles four denominations (configurable)

- 30 \$20 bills 30 \$10 bills
- 60 \$5 bills
- 60 \$1 bills

Includes one cash loader cassette (250 banknote capacity)

Includes one cash box (600 banknote capacity)